

# 螺旋挡圈




www.bolispring.com  
bolispring@aliyun.com  
+86-577-62799797

## SS

### SERIES

轻负荷  
Light Duty

轴用  
External

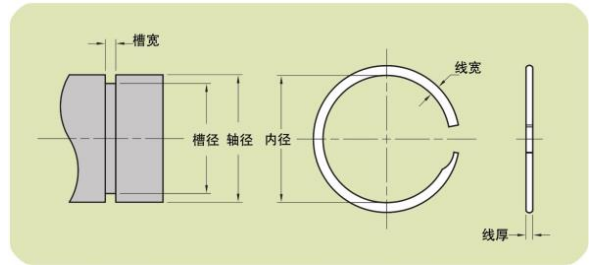

型号	轴径	环 (MM)			槽 (MM)		强度 (KN) <sup>3</sup>
		内径	线宽	线厚	槽径	槽厚	
SS-6*	6	5.65	0.51	0.30	5.70	0.38	1.99
SS-7*	7	6.58	0.51	0.30	6.64	0.38	2.23
SS-8*	8	7.52	0.64	0.38	7.60	0.46	3.18
SS-9*	9	8.42	0.76	0.38	8.50	0.46	3.58
SS-10*	10	9.32	0.89	0.38	9.40	0.46	3.98
SS-11	11	10.32	0.89	0.38	10.40	0.46	4.38
SS-12	12	11.22	1.14	0.46	11.34	0.56	5.78
SS-13	13	12.15	1.14	0.46	12.28	0.56	6.26
SS-14	14	13.15	1.14	0.46	13.28	0.56	6.74
SS-15	15	14.14	1.14	0.46	14.28	0.56	7.22
SS-16	16	15.13	1.14	0.46	15.28	0.56	7.71
SS-17	17	16.13	1.14	0.46	16.28	0.56	8.19
SS-18	18	17.12	1.14	0.46	17.28	0.56	8.67
SS-19	19	18.11	1.14	0.46	18.28	0.56	9.15
SS-20	20	19.10	1.14	0.46	19.28	0.56	9.63
SS-21	21	19.74	1.65	0.53	19.94	0.66	11.65
SS-22	22	20.73	1.65	0.53	20.94	0.66	12.21
SS-24	24	22.72	1.65	0.53	22.94	0.66	13.32
SS-25	25	23.71	1.65	0.53	23.94	0.66	13.87
SS-26	26	24.63	2.24	0.64	24.88	0.79	15.14
SS-28	28	26.62	2.24	0.64	26.88	0.79	16.30
SS-29	29	27.61	2.24	0.64	27.88	0.79	16.88
SS-30	30	28.59	2.24	0.64	28.88	0.79	17.47
SS-32	32	30.57	2.24	0.64	30.88	0.79	18.63
SS-34	34	32.56	2.24	0.64	32.88	0.79	19.80
SS-35	35	33.55	2.24	0.64	33.88	0.79	20.38
SS-36	36	34.54	2.24	0.64	34.88	0.79	20.96
SS-38	38	36.52	2.24	0.64	36.88	0.79	22.12
SS-40	40	38.09	3.00	0.79	38.52	0.99	28.75
SS-42	42	40.07	3.00	0.79	40.52	0.99	30.19
SS-45	45	43.04	3.00	0.79	43.52	0.99	32.34
SS-48	48	46.01	3.00	0.79	46.52	0.99	34.50
SS-50	50	47.99	3.00	0.79	48.52	0.99	35.93
SS-52	52	49.48	4.01	0.79	50.06	0.99	37.37
SS-55	55	52.46	4.01	0.79	53.06	0.99	39.53
SS-56	56	53.44	4.01	0.79	54.06	0.99	40.25
SS-58	58	55.42	4.01	0.79	56.06	0.99	41.68
SS-60	60	57.40	4.01	0.79	58.06	0.99	43.12
SS-62	62	59.37	4.01	0.79	60.06	0.99	44.56
SS-63	63	60.35	4.01	0.79	61.06	0.99	45.28




# SS

## SERIES

轻负荷  
Light Duty

轴用  
External

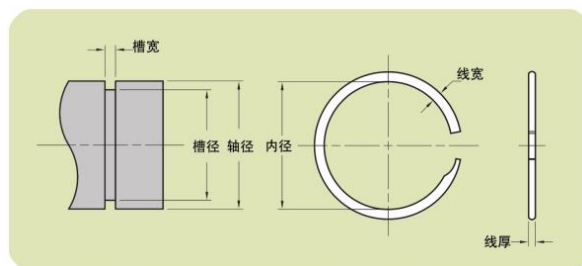

型号	轴径	环 (MM)					槽 (MM)		强度 (KN) <sup>3</sup>	
		内径	线宽	线厚	槽径	槽厚				
SS-65	65	62.33		4.01		0.79	63.06	0.99	46.72	
SS-68	68	65.31		4.01		0.79	66.06	0.99	48.87	
SS-70	70	67.29	+0/-0.64	4.01	±0.10	0.79	68.06	0.99	50.31	
SS-72	72	69.27		4.01		0.79	70.06	0.99	51.75	
SS-75	75	72.25		4.01		0.79	73.06	0.99	53.90	
SS-78	78	74.85		4.78		0.99	75.66	1.12	70.25	
SS-80	80	76.82		4.78		0.99	77.66	±0.15	72.05	
SS-82	82	78.79		4.78		0.99	79.66	1.12	73.85	
SS-85	85	81.76	+0/-0.76	4.78		0.99	82.66	1.12	76.55	
SS-88	88	84.73		4.78		0.99	85.66	1.12	79.26	
SS-90	90	86.69		4.78		0.99	87.66	1.12	81.06	
SS-95	95	91.66		4.78		0.99	92.66	1.12	85.56	
SS-100	100	96.62		4.78		0.99	97.66	1.12	90.06	
SS-105	105	101.13		5.72		1.17	102.20	1.32	106.44	
SS-110	110	106.08		5.72		1.17	107.20	1.32	111.51	
SS-115	115	111.03	+0/-0.89	5.72	±0.13	1.17	112.20	1.32	116.58	
SS-120	120	115.98		5.72		1.17	117.20	1.32	121.65	
SS-125	125	120.93		5.72		1.17	122.20	±0.18	126.71	
SS-130	130	125.88		5.72		1.17	127.20	1.32	131.78	
SS-135	135	130.31		5.72		1.55	131.63	1.70	181.30	
SS-140	140	135.13		5.72		1.55	+0	136.50	1.70	188.01
SS-150	150	144.83		5.72		1.55	-0.05	146.25	1.70	201.44
SS-155	155	149.66		5.72		1.55		151.13	1.70	208.16
SS-160	160	154.44	+0/-1.14	6.73		1.55		156.00	1.70	214.87
SS-165	165	159.27		6.73		1.55		160.88	1.70	221.59
SS-170	170	164.09		6.73		1.55		165.75	1.70	228.30
SS-175	175	168.92		6.73		1.55		170.63	1.70	235.02
SS-180	180	173.75		6.73		1.55		175.50	1.70	241.73
SS-185	185	178.57		7.62		1.55		180.38	1.70	248.45
SS-190	190	183.40		7.62		1.55		185.25	1.70	255.16
SS-195	195	188.22		7.62		1.55		190.13	1.70	261.88
SS-200	200	193.05	+0/-1.52	7.62		1.55		195.00	±0.20	268.59
SS-210	210	202.70		8.76		1.93		204.75	2.08	351.16
SS-220	220	212.36		8.76		1.93		214.50	2.08	367.88
SS-230	230	222.01		8.76	±0.15	1.93		224.25	2.08	384.60
SS-240	240	231.66		8.76		1.93		234.00	2.08	401.35
SS-250	250	241.31		8.76		1.93		243.75	2.08	418.05
SS-260	260	250.97	+0/-1.78	9.65		1.93		253.50	2.08	434.77
SS-270	270	260.62		9.65		1.93		263.25	2.08	451.49
SS-280	280	270.27		9.65		1.93		273.00	2.08	468.21
SS-290	290	279.92		9.65		1.93		282.75	2.08	484.94
SS-300	300	289.58		9.65		1.93		292.50	2.08	501.66